


# nbn Hybrid Fibre Coaxial



These instructions explain how to connect your Leaptel router to the nbn.

Please contact support if you have any questions, our contact details are at the bottom

1. Locate the NBN Connection Box. It looks something like this:

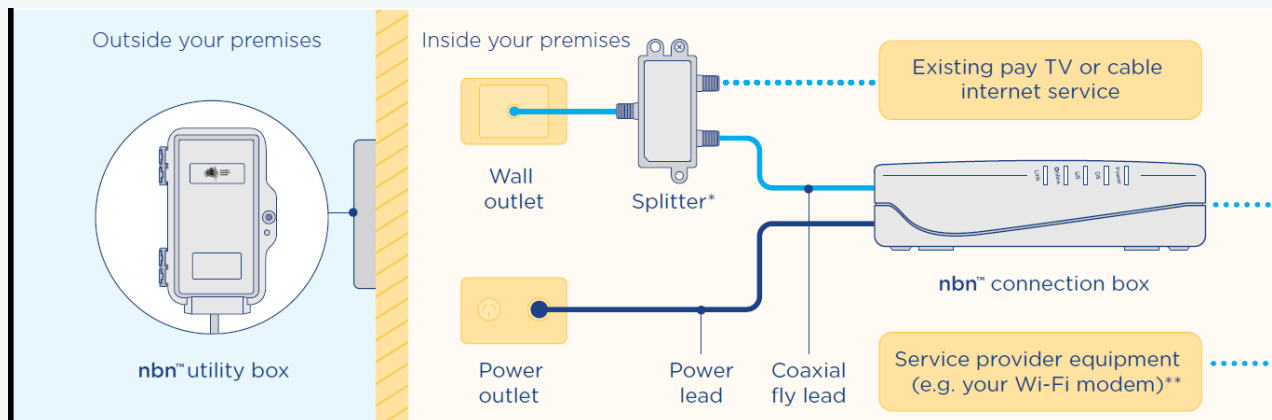

2. Unpack your supplied TP-Link Router and connect the power near the nbn connection box and turn it on.


3. Run the supplied white network cable from the yellow LAN4/WAN port on the TP-Link Router to the wall socket or the Lan1 socket on the nbn connection box.



4. Once you connect the power supply, your router will turn on.



5. After 60 seconds the internet light should also come on.

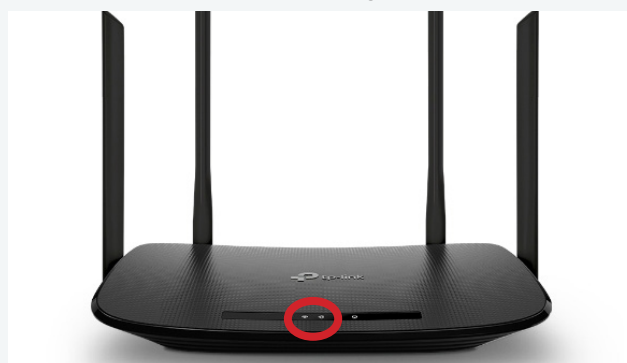

6. You are now online and able to connect to the internet.

- If you wish to connect via wireless, look on the bottom of your modem for your wireless details and use the credentials supplied to connect your computer up. Your wireless details are also provided on a card in the box with your modem. For further information on how to do this please consult your devices documentation or the Leaptel website
- If you wish to connect via ethernet cable, you need to plug your cables into the yellow ethernet ports between your computer and the modem. Some homes have had ethernet cable run which can be used for this purpose. Please talk to your electrician or builder for further information.

## Contact Us

### By Phone

1300 205 327  
9am-9pm Mon-Fri  
9am-7pm Sat & Sun  
Times are Melbourne local time.



### Online

leaptel.com.au  
9am-9pm Mon-Fri  
9am-7pm Sat & Sun  
Times are Melbourne local time.



### Public Holiday Hours

Australian Public Holidays: Closed  
Victorian Public Holiday: Weekend Hours

### By Email

support@leaptel.com.au

